



# AquaFresh COOL COATING SYSTEM FOR TERRACES

Helps in keeping your house cool and prevents  
Water Seepage through the Terrace

## AquaFresh Cool powered by TeraFix

### PRODUCT DESCRIPTION

AquaFresh Cool is a single Pack Water based Acrylic Paint for Terrace to prevent heat build-up on the roof by continuously reflecting IR radiations from the sun.

TeraFix is a single pack solvent based Primer for concrete terrace surfaces and porous terrace tiles. TeraFix adheres strongly to the substrate and resists water from penetrating through the surface. The coating can be extended to the parapet.



### AVAILABLE PACKS

**TeraFix** : 4 litres, 10 litres & 20 litres  
**AquaFresh Cool**: 1 litre, 4 litres, 10 litres & 20 litres



### SURFACE PREPARATION

- The surface should be free from dust, dirt and other contamination
- Ensure that the surface to be coated is completely dry
- Ensure that the surface is not affected by algae & fungi
- Completely remove existing coating, if any, to ensure direct adhesion of TeraFix to the surface
- Remove loose particles sticking on the terrace floor
- For Freshly plastered surfaces, painting can be Initiated only after 30 days
- Clean thoroughly using a wire brush and then scuff the surface using #80 sanding paper.

### THINNING

- Mix with 5% of MRF Vapocure GP Thinner for thinning TeraFix
- Mix with 30-40% of Potable Water for the thinning of AquaFresh Cool
- Stir well before use

### COVERAGE

**TeraFix** : 30 to 35 Sq ft. per litre per coat  
**AquaFresh Cool** : 100 to 120 Sq ft. per litre  
per coat

**Mode of Application:** Brush & Roller

### SHELF LIFE



One year from the month of manufacturing  
for an unopened container



# AquaFresh COOL COATING SYSTEM FOR TERRACES

Helps in keeping your house cool & prevents Water Seepage through the Terrace

## APPLICATION PROCEDURE

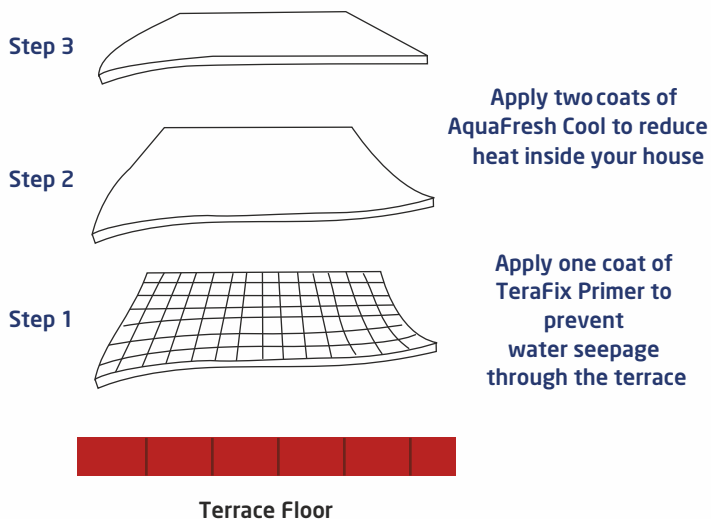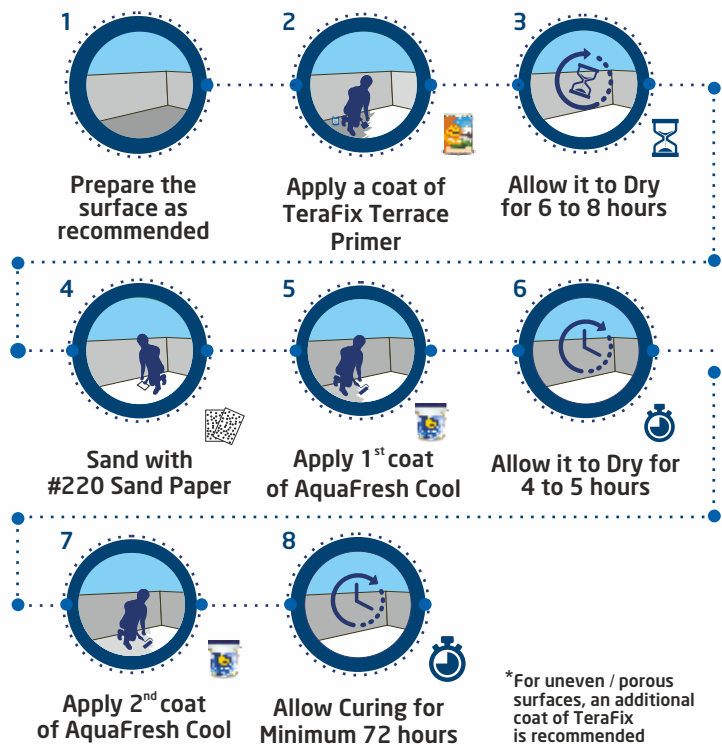

## PRECAUTIONS

- Do not apply if the surface is damp or when the humidity is high
- Damaged surface should be rectified before application of TeraFix

## TeraFix Warranty

- 2 years "No Water Seepage Warranty" - with 1 coat of TeraFix
- 5 years "No Water Seepage Warranty" - with 2 coat of TeraFix

## Terms of Warranty

- Surface Preparation and Application to be carried out as recommended
- Application of TeraFix to be done completely without leaving any free space in the terrace surface / parapet
- Cracked, damaged or Overly Porous surfaces to be fixed before coating the terrace surface / parapet with TeraFix Terrace Primer
- Coating should remain intact without any tampering
- Proper care should be taken to maintain a clean terrace and water logging to be avoided
- Ensure proper waterproofing on vertical walls to avoid water seepages
- Water seepage through side walls are not covered by this warranty
- Wear and tear of the coating due to high traffic are not covered by this warranty
- Warranty applies, only if the coated surface is recoated with AquaFresh Cool every 2 years
- Warranty claims will be processed only after complete investigation of the site by company officials and only with proper proof of purchase invoice

